

| SPECIFICATION                              | RANGE  | ACCURACY | RESOLUTION |
|--|--|----------|------------|
| DC Current Measurement:                    | 0.2-100 A  | ±5%      | ±100mA     |
| DC Voltage Measurement:                    | ±330 V   | ±5%      | ±50mV      |
| AC Current Pickup Threshold (MCon timing): | 10 mA  | 1mA      |            |
| Timing parameters:                         |  | ±0.2 ms  | ±0.1 ms    |
| Handset Power Supply:                      | 10-15 V DC, 24W                                  |          |            |
| Inline Power Supply:                       | 85-265 V AC                                      |          |            |
|  | 50 / 60 Hz                                       |          |            |
| Profile Battery Supply:                    | 8x AA (Rechargeable (NiMH) or standard alkaline) |          |            |
|  | 6 hours under normal usage                       |          |            |
| Screen:                                    | 5.7" Color Display, 640 x 480 (VGA))             |          |            |
| Operating temperature:                     | -20°C à +50°C (-4°F à +122°F)                    |          |            |
| Handset record storage:                    | ≥ 1000 records                                   |          |            |

**PROFILE P3 with accessories**

- DC Probe (Hall Effect CT)
- 3 Peg CTs
- DC Voltage probes
- DC power supply
- USB memory stick & lead
- Peli™ case

**Offline Interface Unit**

- Interface unit (provides 24V DC signal across circuit breakers)
- AC power lead
- Four 5 metre colour coded leads
- **PROFILE P3** handset connection cables
- Breakout box
- Carry case with strap



**Head Office**  
 Camlin Power  
 31 Ferguson Drive  
 Knockmore Hill Industrial Park  
 Lisburn BT28 2EX  
 Northern Ireland  
  
 +44 (0)28 9262 6989  
 mail@camlinpower.com

**International Sales & Support Offices**

**North America**  
 Camlin Power Inc  
 1765 N. Elston Ave. Unit 105  
 Chicago, IL 60642  
 USA  
  
 +1 (773) 598 4126  
 mail@camlinpower.com

**Europe**  
 Camlin Power  
 Zum Brückenberg 31A  
 59872 Meschede  
 Germany  
  
 +49 (0)172 283 72 02  
 mail@camlinpower.com

**China**  
 Camlin Power  
 Room 101, Building No.6,  
 600 West Yunling Road,  
 Putuo District, Shanghai, 200333  
 China  
  
 +86 (0)159 2160 1457  
 mail@camlinpower.com

**South America**  
 Camlin Power  
 Azul Loureiro, 910  
 SP/Brasil  
 São Paulo  
 Brazil  
  
 +55 (13) 3386 2571  
 mail@camlinpower.com

**Asia Pacific**  
 Camlin Power  
 Suite 1A ,Level 2  
 802 Pacific Highway  
 Gordon NSW, 2072  
 Australia  
  
 +61 (0)426 118 101  
 mail@camlinpower.com

**Russia**  
 Business centre "Pollars", bld. A, office A620,  
 Derbenevskaya emb. 11,  
 Moscow,  
 Russian Federation, 115114  
 Russia  
  
 +7(985)757-00-46  
 mail@camlinpower.com

**South Africa**  
 Nugen Technologies (Pty) Ltd  
 No 17A Knights Gate  
 Complex, Corner of Jack &  
 Jonas roads, Germiston, 1400  
 South Africa  
  
 +27(0)82 464 5671  
 info@camlinpower.co.za  
 www.nugentechnologies.co.za



# PROFILE P3

## Circuit Breaker Analyser

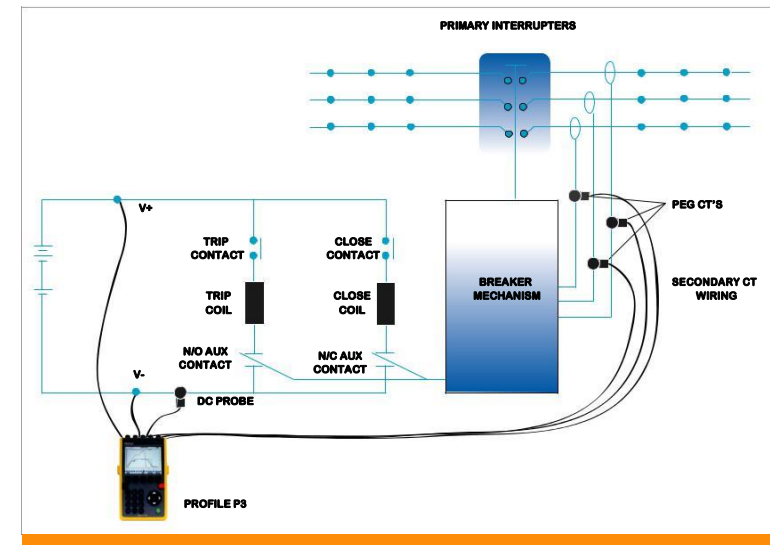


Figure 1: The PROFILE P3 connected for an online 3 phase


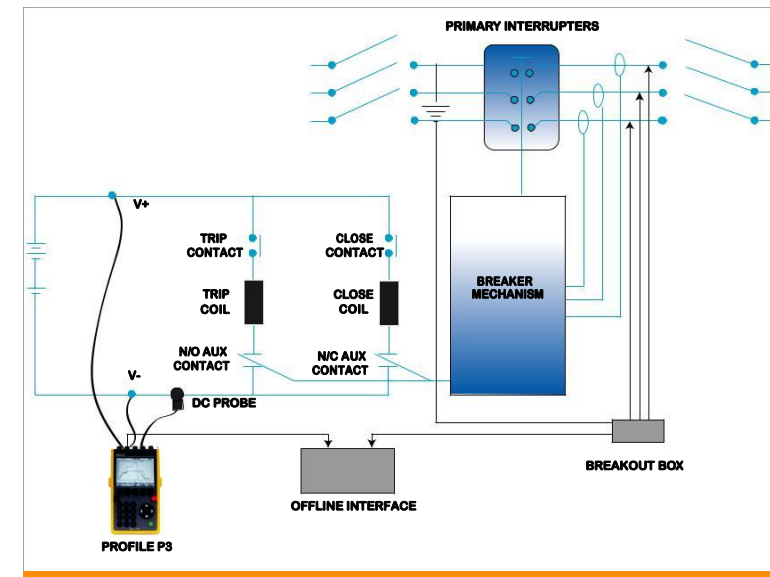


Figure 2: The PROFILE P3 connected for an offline test

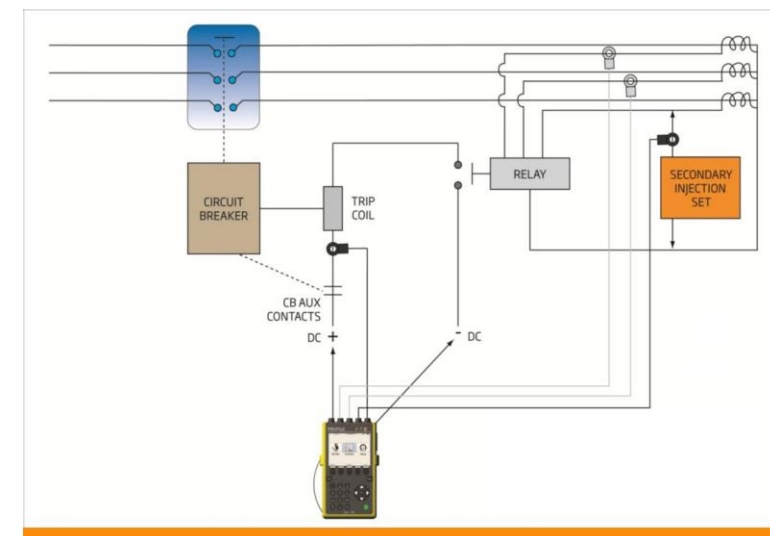

**Online Test**

Figure 1 shows how the **PROFILE P3** is connected for a 3-phase test on a 'live' circuit breaker

- The DC current flowing through the tripcoil is measured by a Hall- Effect CT and provides analysis of both the trip coil and main mechanism operation!
- The voltage probe measurement provides a clear indication of the condition of the DC battery and associated wiring
- Peg CT's indicate when the current flowing in the main circuit has been interrupted, which gives main contact time

**OPTIONAL ACCESSORIES**

**Offline Test**

Figure 2 shows how the **PROFILE P3** is connected for a 3 phase Offline Test when the circuit breaker has been isolated.

The addition of an Interface Unit enables DC current to be injected through the circuit breaker.

This enables the main contact and 'pole-spread' times to be accurately measured.

**Combined Protection Relay and Circuit Breaker Online Test**

Figure 3 shows how the **PROFILE P3** is connected for a combined protection relay and circuit breaker test. Current is injected into the protection secondary circuit of a 'live' circuit breaker which initiates a relay trip operation.

The **PROFILE P3** is then triggered and captures both the relay trip time and normal circuit breaker parameters of Buffer, Acon, Mcon and DC voltage.

This provides the Total Trip Time for the circuit breaker and corresponding protection relay.

**PROFILE P3** provides a unique insight into the true condition of circuit breakers at all voltages. Capturing the vital 'first trip' shows how the breaker would perform in a real-life fault situation.

**Problem**


A slow tripping circuit breaker can cause major disruptions on power networks resulting in:

- Widespread loss of supply
- Damage to plant
- Potential safety issues
- CI / CML financial penalties

Conventional testing requires a circuit breaker to be isolated. However this **first trip** operation can often temporarily clear any slow tripping problem.

Therefore capturing the 'first trip' operation is essential to effective circuit breaker condition monitoring.

**Standard Trip Coil Profile**

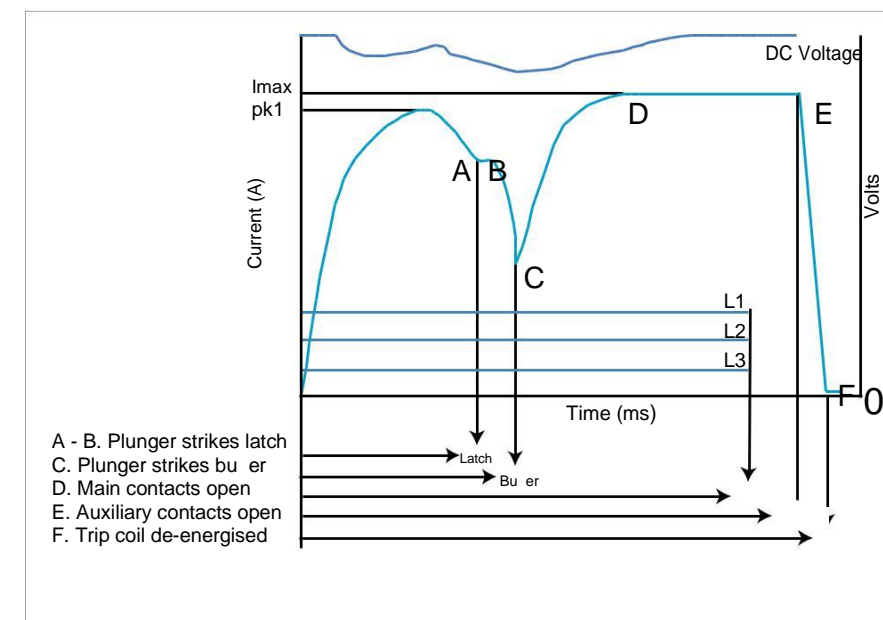

**Solution**

The **PROFILE P3** offers a cost effective solution by enabling:

- Fast and simple online test
- Capture vital **first trip** operation
- Combined relay and circuit breaker test
- Onsite analysis of breaker defects
- Efficiently target critical resources

**PROFILE P3** is a powerful diagnostic tool for analysing:

- Main contact operating time
- Auxiliary contact operating time
- 'Health' of Close & Trip coils
- Condition of DC battery circuit
- Auxiliary contact condition
- The Total Trip Time



PROFILE P3 in use

**Key Features**

**Powerful Onsite Analysis**

The **PROFILE P3** can display and overlay up to 4 records in graphical form. This enables quick onsite analysis of potential defects by comparing a first trip or close profile to subsequent circuit breaker operations.

**Combined Protection Relay and Circuit Breaker Online Test**

An enhanced version of the software enables both the protection relay and circuit breaker trip times to be captured.

Knowing the Total Trip Time is important when considering protection discrimination and arc flash hazard compliance.

**Multi-shot Mode**

With this function the **PROFILE P3** is able to re-arm and capture multiple circuit breaker operations.

This can be used for monitoring a circuit breaker during faults or SCADA initiated operations. Also it can be used to capture a sequence of trip/close operations during one test setup.

**Automated Comparison Function**

This provides a clear pass/fail (green/red) indication by determining if the key parameters – Buffer, Acon, Mcon are outside user set tolerances between the first, second and third trip operations.

**Circuit Breaker Database on PROFILE P3**

All the required circuit breaker asset details can be saved on the PROFILE P3 via a USB memory stick. This speeds up entry of test details and also improves accuracy.

**REPLAY PRO**

The REPLAY PRO software is an integral part of the **PROFILE P3** system which enables efficient profile record storage, retrieval and analysis.

It provides the critical link between the **PROFILE P3** and those within the organisation who need to access the Profile data in order to effectively manage their assets.

The REPLAY PRO software can be downloaded from the **CAMLIN POWER** website to any PC where the data can be accessed locally or made available to multiple users on a central server.

**Key Features**

- Efficient storage
- Multiple search
- Display and control
- Automated analysis parameters
- Export records
- Export of data programmes
- View AC data

